

PRODUCT SPECIFICATION

Thermal Bluestone

Description: Thermal Bluestone is a unique sandstone quarried in the northeast counties of Penn-

sylvania and the southern tier of New York state. Each piece is dimensionally cut to size and a very high temperature flame is applied to the surface to roughen the tex-

ture.

Country of Origin: USA Geology: Quartzitic Sandstone


Stocking Sizes: Treads, Widestock, Sills, Monolithic Lead Time for 1-3 weeks

Steps, Patterned Flagging, Pier Caps, Special Orders:

Slab Cutting Stock

Mechanical Properties: Density 163 lbs/c.f.

Water Absorption 1.08 %
Modulus of Rupture 2,293 psi
Compressive Strength 22,713 psi

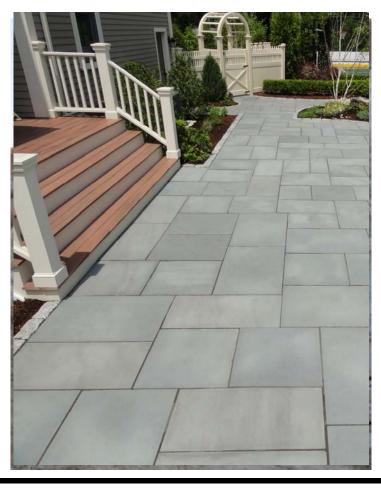



26 Commerce Blvd Plainville, MA 02762 T: 508-699-5665 F: 508-695-3057 W: www.northeast-masonry.com